



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number: **0 460 948 A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **91305109.0**

(51) Int. Cl.⁵: **C07D 317/42**

(22) Date of filing: **06.06.91**

(30) Priority: **07.06.90 IT 2057890**

(43) Date of publication of application:
11.12.91 Bulletin 91/50

(84) Designated Contracting States:
BE DE ES FR GB NL


(71) Applicant: **AUSIMONT S.p.A.**
31, Foro Buonaparte
I-20121 Milano (IT)

(72) Inventor: **Navarrini, Walter**
46/48, Via A Moro
I-20010 Boffalora Sopra Ticino, Milan (IT)
Inventor: **Fontana, Simonetta**
8, Via Odazio
I-20147 Milan (IT)
Inventor: **Montanari, Vittorio**
29, Via Muratori
I-20135 Milan (IT)

(74) Representative: **Jones, Helen Marjorie**
Meredith et al
GBI Jennings & Every 53-64 Chancery Lane
London WC2A 1HN (GB)

(54) Process for preparing halogenated 1,3-dioxolanes and new products obtained.

(57) A process for preparing 1,3-dioxolanes of formula:



(I)

wherein;

X₁, X₂, X₃ and X₄, like or different from one another, represent F, Cl, Br, I, CF₂OSO₂F, SO₂F, C(O)F, H, perhaloalkyl or oxyperhaloalkyl radicals containing from 1 to 5 carbon atoms,


X₅ and X₆, like or different from each other, represent F or CF₃. Said process is characterized in that a bis(fluoroxy)perfluoroalkane is reacted, at a temperature ranging from -140°C to +60°C, with a halogenated olefin.

New 1,3-dioxolanes of formula (I) belonging to the class defined hereinbefore.

EP 0 460 948 A2

The present invention relates to a process for preparing halogenated 1,3-dioxolanes and new halogenated 1,3-dioxolanes.

More particularly, the present invention relates to the preparation of halogenated 1,3-dioxolanes having formula:

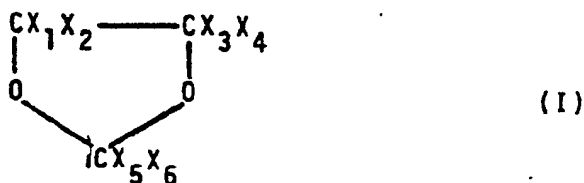

wherein:

X_1 , X_2 , X_3 and X_4 , like or different from one another, represent F, Cl, Br, I, $\text{CF}_2\text{OSO}_2\text{F}$, SO_2F , $\text{C}(\text{O})\text{F}$, H, perhaloalkyl or oxyperhaloalkyl radicals containing from 1 to 5 carbon atoms,

X_5 and X_6 , like or different from each other, represent F or CF_3 .

According to the art, halogenated 1,3-dioxolanes are prepared starting from complex reagents or using industrially onerous multistage processes, which provide often low or not constant yields, as is better explained later on.

German patent application 2,604,350 teaches the synthesis of halogenated 1,3-dioxolanes by fluorination of the corresponding ethylcarbonate with $\text{SF}_4 + \text{HF}$ (or TiF_4).

Published European patent application No. 80,187 describes the synthesis of perfluoro-1,3-dioxole and of its polymers via dechlorination of the corresponding 4,5-dichloro-dioxolane, prepared starting from ethylene carbonate by photochemical chlorination with Cl_2 and subsequent fluorination with $\text{SF}_4 + \text{HF}$ and with SbF_3 (or HF) + SbCl_5 ; the yields of said last step can also be higher than 90% but they are not reproducible.

The abovesaid 4,5-dichlorodioxolane is also prepared from 1,3-dioxolane by photochemical chlorination with Cl_2 and fluorination with SbF_3 (or HF) + SbCl_5 ; however, the total yield does not exceed 7%.

U.S. patent 2,925,424 describes how to synthesize halogenated 1,3-dioxolanes by reacting a perhaloketone with a 2-haloethanol.

In U.S. patents 3,865,845 and 3,978,030, fluorinated dioxoles and homopolymers and copolymers thereof are prepared by dehalogenizing dioxolanes with two vicinal halogens, prepared according to the method described in the above-cited U.S. patent 2,925,424.

European patent applications Nos. 76,581 and 301,881 describe the condensation of a fluorinated ketoester with a 2-haloethanol or an ethylene oxide in order to obtain halogenated 1,3-dioxolanes.

U.S. patent 3,699,145 describes the photo-oxidation of perfluoropropene with molecular oxygen whereby it is possible to obtain, along with various straight perfluoropolyethers, low amounts of perfluoro-4-methyl-1,3-dioxolane and of perfluoro-2,4-dimethyl-1,3-dioxolane.

In Journal of Fluorine Chemistry 12 (1978), pages 23-29, the reaction of bis(fluoroxy-difluoromethane with the Dewar hexafluorobenzene is described; it is expressly stated that, although the perfluorocycloolefins are generally not reactive towards bis(fluoroxy)difluoromethane, in the case of the Dewar hexafluorobenzene, along with polymeric products, oxiranic products and products resulting from a simple fluorination of the double bond, there are obtained, with low yields, products having a dioxolane structure; the higher reactivity is attributable to its particular dicyclic structure, which exhibits olefinic bonds with anomalous angles.

Lastly, Organic Chemistry 3 (1986), 624-6, describes the reaction of bis(fluoroxy)difluoromethane (hereinafter briefly referred to as "BDM") with two particular olefins: tetrafluoroethylene and trans-1,2-dichloroethylene.

When it is operated with tetrafluoroethylene, a mixture of the olefin, diluted in a nitrogen excess, is fed to BDM at a temperature of -184°C ; at said temperature the reagents are in the solid state. Alternatively, the olefin and the BDM are condensed together in the reaction vessel at -184°C . In both cases, not the corresponding 1,3-dioxolane but the addition product of formula $\text{CF}_2(\text{OCF}_2\text{-CF}_3)_2$ is obtained.

In the reaction with trans-1,2-dichloroethylene it is operated, according to the above-cited article, by condensing the olefin with a solvent and the BDM in the reaction vessel at a temperature of -184°C and then allowing the whole to stand for a few days at room temperature. Also in this case, not the corresponding 1,3-dioxolane, but the straight compound of formula $\text{CF}_2(\text{OCH-CHClF})_2$ is obtained.

Thus, from the examined prior art it is apparent that up to the date of the present invention it was not known to prepare 1,3-dioxolanes by direct reaction of olefins with bis(fluoroxy)perfluoroalkanes, and only a limited number of halogenated 1,3-dioxolanes could be prepared by means of complicated processes and with not

always satisfactory and reproducible yields.

Thus, it is an object of the present invention to provide a single-stage process for preparing 1,3-dioxolanes of formula (I), which does not exhibit the limitations and the drawbacks affecting the processes of the prior art.

Another object of the present invention is to provide new halogenated 1,3-dioxolanes.

Thus, an object of the present invention is a process for preparing halogenated 1,3-dioxolanes of formula (I) wherein:

X_1, X_2, X_3 and X_4 , like or different from one another, represent F, Cl, Br, I, CF_2OSO_2F , SO_2F , $C(O)F$, H, perhaloalkyl or oxyperhaloalkyl radicals containing from 1 to 5 carbon atoms,

X_5 and X_6 , like or different from each other, represent F or CF_3 ,

characterized in that a bis(fluoroxy)perfluoroalkane of formula $C(OF)_2X_5X_6$ is reacted, at a temperature ranging from -140° to $+60^\circ C$, with a halogenated olefin of formula $CX_1X_2=CX_3X_4$, X_1, X_2, X_3, X_4, X_5 and X_6 being the same as defined hereinbefore.

In a preferred embodiment of the invention, a flow of a bis(fluoroxy)perfluoroalkane, preferably in the presence of an inert diluting gas, and optionally also a gaseous or liquid stream consisting of a halogenated olefin, are fed into a liquid phase consisting of a halogenated olefin and of a solvent, if any, maintained at the above-cited reaction temperature.

As an alternative, the halogenated olefin and the bis(fluoroxy)perfluoroalkane are simultaneously fed into a vessel containing optional solvent.

At the end of the reaction time, feeding of the reagents is stopped and the reaction products are separated from the solvent, if any, and from the unreacted olefin, if present, preferably by fractionated distillation.

The reaction can be conducted also in a thoroughly continuous manner by continuously withdrawing a liquid phase portion from the reactor, from this phase the reaction products are separated and recovered, while the optional solvent and the unreacted olefin are recycled.

The total pressure in the reaction environment preferably ranges from 1 to 10 kg/cm² abs.

More usually, it is operated at about the atmospheric pressure.

The inert diluting gas of bis(fluoroxy)perfluoroalkane when it is utilized, is selected for example from nitrogen, argon, helium, CF_4 and C_2F_6 .

A further embodiment of the present invention consists in a particular discontinuous process for preparing halogenated 1,3-dioxolanes of formula (I), wherein:

X_1, X_2, X_3 and X_4 , like or different from one another, represent F, Cl, Br, I, CF_2OSO_2F , SO_2F , $C(O)F$, H, perhaloalkyl or oxyperhaloalkyl radicals containing from 1 to 5 carbon atoms,

X_5 and X_6 , like or different from one another, represent F or CF_3 ,

characterized in that a bis(fluoroxy)perfluoroalkane of formula $C(OF)_2X_5X_6$ is reacted, at a temperature ranging from $-140^\circ C$ to $+60^\circ C$, with a halogenated olefin of formula $CX_1X_2=CX_3X_4$, X_1, X_2, X_3, X_4, X_5 and X_6 being the same as defined hereinbefore, on condition that at least one from among X_1, X_2, X_3 and X_4 is F.

In the discontinuous method the reagents are condensed at a temperature not exceeding $-140^\circ C$ in the reaction vessel, preferably along with a solvent.

The abovesaid condensation is preferably conducted at a temperature of $-196^\circ C$.

The reaction vessel so charged is usually allowed to reach the desired reaction temperature and is maintained at this temperature for a time ranging from 1 hour to 24 hours.


The reaction products are purified by vacuum distillation by causing the vapours to flow through cooled traps.

It must be pointed out that the temperature at which the reagents are condensed in the reaction vessel is not the actual reaction temperature, but only a convenient experimental procedure for charging the reagents in a discontinuous and exact manner without letting them react or to minimise any reaction until the desired reaction temperature is reached.

In the discontinuous method the pressure preferably ranges from 0.5 to 20 kg/cm² abs.

In both processes the reaction can be conducted in a condensed phase or in a gas phase.

The synthesis of bis(fluoroxy)perfluoroalkanes of formula:



wherein X is F or CF_3 , is described in JACS (1967), 2263 and in U.S. patent 3,420,866.

Among the utilized bis(fluoroxy)perfluoroalkanes, bis(fluoroxy) difluoromethane (BDM) is particularly pre-

ferred.

The synthesis of BDM is described in JACS (1967), 1809-10.

The halogenated olefins utilized in the present invention preferably contain from 2 to 6 carbon atoms.

Particularly preferred olefins are, for example: $\text{CFCl}=\text{CFCl}$, $\text{CFBr}=\text{CFBr}$, $\text{CF}_2=\text{CFBr}$, $\text{CF}_2=\text{CH}-\text{CF}_3$,
 5 $\text{CF}_2=\text{CF}-\text{SO}_2\text{F}$, $\text{CF}_2=\text{CF}-\text{CF}_2-\text{OSO}_2\text{F}$, $\text{CF}_2=\text{CF}-\text{C}(\text{O})\text{F}$, $\text{CF}_2=\text{CF}-\text{CF}_3$, $\text{CF}_2=\text{CF}-\text{O}-\text{CF}_2-\text{CF}_3$.

The reaction temperature for both processes is usually in the range from -140° to $+60^\circ\text{C}$; preferably it ranges from -100° to $+30^\circ\text{C}$.

The solvent, when it is utilized, is preferably selected from straight and cyclic fluorocarbons, chlorofluorocarbons, perfluoroamines and perfluorinated ethers.

10 Examples of suitable fluorocarbons and chlorofluorocarbons are: perfluorocyclobutane, perfluorocyclohexane, 1-chloropentafluoroethane, 1,1,2-trichloro-1,2,2-trifluoroethane, 1,2-dichlorotetrafluoroethane and 1,1,1-trifluorotrichloroethane.

Examples of suitable perfluoroamines are the perfluoroaminic Fluorinert® produced by 3M Co.

Examples of suitable perfluorinated ethers are the perfluoropolyethers having a boiling point lower than
 15 250°C , such as the Galden® produced by Montefluos.

The halogenated olefin concentration in the liquid phase generally ranges from 0.01 to 10 moles/liter and above, i.e. up to the molar concentrations of the haloolefins in the pure state.

A further object of the present invention are new 1,3-dioxolanes of formula (I), wherein:

20 X_1 , X_2 , X_3 and X_4 , like or different from one another, represent F, Cl, Br, I, $\text{CF}_2\text{OSO}_2\text{F}$, SO_2F , $\text{C}(\text{O})\text{F}$, H, perhaloalkyl or oxyperhaloalkyl radicals containing from 1 to 5 carbon atoms, X_5 and X_6 , like or different from each other, represent F or CF_3 , on condition that at least one from among X_1 , X_2 , X_3 and X_4 is Br, I, $\text{CF}_2\text{OSO}_2\text{F}$, SO_2F , $\text{C}(\text{O})\text{F}$, a perhaloalkyl or oxyperhaloalkyl radical containing from 1 to 5 carbon atoms and furthermore that, when one from among X_1 , X_2 , X_3 and X_4 is CF_3 , at least one among the other three is different from F, or
 25 X_5 and X_6 are CF_3 , and when one from among X_1 , X_2 , X_3 and X_4 is Br or I, the other three are F, or at least one among X_5 and X_6 is F.

The abovesaid 1,3-dioxolanes are preparable according to the process of the present invention by reacting, at a temperature ranging from -140°C to $+60^\circ\text{C}$, a bis(fluoroxy)perfluoroalkane of formula $\text{C}(\text{OF})_2\text{X}_5\text{X}_6$ with a halogenated olefin of formula $\text{CX}_1\text{X}_2=\text{CX}_3\text{X}_4$, where for X_1 , X_2 , X_3 , X_4 , X_5 and X_6 the above-listed conditions are valid.

30 The starting halogenated olefin of formula $\text{CX}_1\text{X}_2=\text{CX}_3\text{X}_4$ preferably contains at least two, and more preferably at least three F atoms among the substituents X_1 , X_2 , X_3 and X_4 .

Furthermore, in the starting bis(fluoroxy)perfluoroalkane of formula $\text{C}(\text{OF})_2\text{X}_5\text{X}_6$, X_5 and X_6 are preferably F.

35 The resulting 1,3-dioxolanes can be utilized as fluorinated fluids, for example as an alternative to the chlorofluorocarbons available on the market.

They are also used as general anaesthetics.

A few halogenated 1,3-dioxolanes comprised in general formula (I), which are an object of the present invention, are listed in Table 1.

40 The dioxolanes marked with an asterisk are covered by the general formula of the new 1,3-dioxolanes object of the present invention.

TABLE 1

5

10

15

20

25

30

35

X_1	X_2	X_3	X_4	X_5	X_6	EXAMPLE No.	DIOXOLANE
F	F	F	SO ₂ F	F	F	1	(1)*
F	F	F	CF ₂ OSO ₂ F	F	F	2	(2)*
F	F	F	C(O)F	F	F	3	(3)*
F	F	F	CF ₃	F	F	4	(4)
F	F	F	OCF ₂ CF ₃	F	F	5	(5)*
F	F	F	Br	F	F	6	(6)*
F	F	H	CF ₃	F	F	7	(7)*
F	F	F	Cl	F	F	8	(8)
F	F	F	CF ₃	CF ₃	F	9	(9)
F	F	F	F	F	F	10	(10)
Cl	Cl	Cl	Cl	F	F	11-12	(11)

40 For a better understanding of the possibilities of carrying into effect the present invention, a few illustrative but not limitative examples are given hereinafter.

Example 1

45 2,2,4,5,5-pentafluoro-4-fluorosulphonyl-1,3-dioxolane (1)

In a Pyrex glass flask having a volume of 50 ml, equipped with a PTFE valve and connected to a vacuum pipe, 2.0 m.moles of distilled CF₂=CF-SO₂F, 2.0 m.moles of chlorotrifluoromethane and 1.0 m.moles of bis-fluoroxy-difluoromethane were condensed in succession at the temperature of liquid nitrogen. The reaction flask was placed into a Dewar vessel containing solid CFCI₃ and liquid nitrogen. After 16 hours, the temperature in the Dewar vessel was of -20°C. Now the reaction flask was furtherly cooled in liquid nitrogen, it was connected to the vacuum pipe and was allowed to reach again the room temperature while fractionating the vapours through traps cooled to -80°C, -110°C and -196°C. The trap at -80°C contained 0.46 m.moles of 2,2,4,5,5-pentafluoro-4-fluorosulphonyl-dioxolane identified by means of NMR and mass spectroscopy.

55 The trap at -110°C contained 2.10 m.moles of a mixture of CFCI₃, of dioxolane (1) and of CF₃CF₂SO₂F as determined by means of NMR and IR spectroscopy.

The trap at -196°C contained 1.90 m.moles of a mixture of COF₂, CFCI₃ and CF₃CF₂SO₂F according to the IR spectrum.

The content of the trap at -110°C was fractionated again through traps maintained at -90°C , -100°C and -196°C : in the first two traps, further 0.14 m.moles of dioxolane (1) were recovered:

The dioxolane (1) yield, defined as the ratio between the moles of dioxolane (1) and the utilized moles of BDM, was equal to 60%.

Characterization of dioxolane (1).

NMR ^{19}F spectrum in p.p.m. relating to $\text{CFCl}_3 = \text{O}$:

+45.6 (1F, SO_2F); -54.1 and -56.7 (2F, OCF_2O); -78.3 and -83.2 (2F, OCF_2CF); -109.6 (1F, CF).

Mass spectrum (electronic impact), main peaks and relevant intensities:
69 (86%); 97 (100%); 135 (4%); 163 (25%).

Infrared spectrum, main absorption bands (cm^{-1}): 1474, 1356, 1259, 1178.

Example 2

2,2,4,5,5-pentafluoro-4-(difluoro-fluorosulphonyloxy)methyl dioxolane (2)

3.5 m.moles of $\text{CF}_2=\text{CF}-\text{CF}_2-\text{OSO}_2\text{F}$, 7.7 m.moles of CFCl_3 , 1.75 m.moles of bis-fluoroxydifluoromethane were successively condensed in a Pyrex glass flask, having a volume of 50 ml and equipped with a PTFE valve, at the temperature of liquid nitrogen. The reaction flask was put into a Dewar vessel containing solid CFCl_3 and liquid nitrogen. After 16 hours, the temperature was equal to -10°C . The flask was allowed to reach again the room temperature in 1 hour. The vapours were fractionated in a vacuum of 10^{-3} mm Hg by means of traps maintained at -60°C , -90°C and -196°C . The trap at -60°C contained 1.14 m.moles of dioxolane (2) identified by its NMR signals and by the mass spectrum. The trap at -90°C contained 6.43 m.moles of CFCl_3 and of $\text{CF}_3\text{CF}_2\text{CF}_2\text{OSO}_2\text{F}$ identified by the NMR spectrum.

The trap at -110°C contained 2.73 m.moles of CFCl_3 identified by infrared spectrum. The trap at -196°C contained 0.95 m.moles of CFCl_3 and traces of bisfluoroxydifluoromethane, as is revealed by IR spectroscopy. The dioxolane (2) yield defined as in example 1 was equal to 65%.

Characterization of dioxolane (2)

NMR ^{19}F spectrum in p.p.m. relating to $\text{CFCl}_3 = \text{O}$

+50.3 (1F, OSO_2F); -54.8 and -58.3 (2F, OCF_2O); -81.3 and -84.8 (2F, OCF_2CF); -83.7 (2F, $\text{CF}_2\text{OSO}_2\text{F}$); -127.0 (1F, CF). Mass spectrum (electronic impact), main peaks and relevant intensities:

293 (< 1%); 227 (< 1%); 213 (< 1%); 149 (37%); 119 (62%); 97 (86%); 83 (65%); 69 (100%); 47 (62%).

Infrared spectrum, main absorption bands (cm^{-1}): 1502, 1360, 1263, 1180.

Example 3

2,2,4,5,5-pentafluoro-4-fluorocarbonyl-1,3-dioxolane (3)

Into a Pyrex glass flask of 50 ml volume, equipped with a PTFE valve, 6 ml of FC75 were introduced, vacuum was created to remove the dissolved air, and 2 m.moles of perfluoroacryloyl fluoride were condensed. The reactor was closed, brought to room temperature and repeatedly stirred. The reactor was then cooled to -196°C and 1 m.mole of BDM was charged through condensation. The reaction flask so charged was placed into a Dewar vessel containing solid CFCl_3 and liquid nitrogen. After 16 hours the temperature was of -10°C . The flask was caused to reach again the room temperature in 1 hour.

The vapours were fractionated in a vacuum of 10^{-3} mm Hg by means of traps maintained at -50°C , -110°C and -196°C . The trap at -50°C contained FC-75, the trap at -110°C contained 0.55 m.moles of (3), identified by the signals in the NMR spectrum and by the infrared spectrum, particularly by the band at 1889 cm^{-1} .

The trap at -196°C contained 1.4 m.moles of $\text{CF}_3\text{CF}_2\text{C}(\text{O})\text{F}$ along with traces of BDM, COF_2 and product (3), identified by the infrared spectrum and NMR spectrum.

The dioxolane (3) yield defined as in example 1 was equal to 55%.

Characterization of dioxolane (3)

NMR ^{19}F spectrum in p.p.m. relating to $\text{CFCl}_3 = \text{O}$

+24.2 (1F, $\text{C}(\text{O})\text{F}$); -53.1 and -58.6 (2F, OCF_2O); -77.8 and

-88.8 (2F, OCF₂CF); -118.6 (1F, CF).

Infrared spectrum, main bands:

1889, 1256, 1181.

5 Example 4

2,2,4,5,5-pentafluoro-4-trifluoromethyl-1,3-dioxolane (4)

In a steel cylinder having a volume of 75 ml there were condensed, at the temperature of liquid nitrogen, 4 m.moles of perfluoropropene followed by 12 m.moles of CF₂Cl₂(FC-12), reaction solvent, and the same was brought again to room temperature to favour the mixing of solvent and perfluoropropene. Then, always at the temperature of liquid nitrogen, further 4 m.moles of FC-12 and 2 m.moles of BDM were condensed in the cylinder, and the reaction temperature was raised very slowly up to room temperature in a time of 24 hours. The content was then gathered in a trap, placed in liquid nitrogen, of a conventional vacuum pipe, and then measured: reaction products and solvent amounted to 20.1 m.moles. The gas-chromatographic analysis, together with the weight balance, of the reaction mixture indicated a dioxolane (4) yield, defined as in example 1, of 95%. ¹⁹F NMR was in accordance with the data reported in literature.

20 Example 5

2,2,4,5,5-pentafluoro-4-perfluoroethoxy-1,3-dioxolane (5)


In a steel cylinder having a volume of 300 ml there were condensed 12.0 m.moles of perfluoroethoxy-perfluoroethylene and 120 ml of CF₂Cl₂ (FC-12), reaction solvent, at the temperature of liquid nitrogen, then the cylinder was brought again to room temperature. In the same cylinder there were subsequently condensed further 5 m.moles of FC-12 and 6 m.moles of BDM, always at the liquid nitrogen temperature, and the temperature in the reactor so charged was then gradually raised to room temperature in a time of 24 hours. The cylinder content was then distilled very slowly in a conventional vacuum pipe through traps maintained at temperatures of -196°C, -120°C, -100°C, -50°C; in the trap at -196°C there was mainly recovered FC-12, in the trap at -120°C there were recovered 32.4 m.moles of a mixture containing 73.7% of FC-12 (GLC), 19% of perfluorodiethylether (GLC) and 3.4% of dioxolane (5) (GLC), in the trap at -100°C there were recovered 1.22 g of a mixture containing 73% (GLC) of (5). The content of said last trap was distilled again further two times through traps maintained at -60°C and -100°C until (5) was obtained with a purity higher than 92%.

The dioxolane (5) yield, defined as for example 1, was equal to 68%. The reaction products were characterized by means of gas chromatography, mass spectrometry, ¹⁹F NMR spectrometry and IR spectrometry.

Characterization of dioxolane (5):

Mass spectrum (electronic impact), main peaks and relevant intensities : 163 (10%); 135 (1,8%); 119 (100%); 116 (31%); 97 (47%); 69 (50%); 69 (50%); 47 (35%).

¹⁹F-NMR in p.p.m. from CFC1₃ = O



2-CF₂: δ_a = -56.17 δ_b = -57.43

5-CF₂: δ_a = -83.36 δ_b = -88.85

4-CF: δ = -85.51

CF₃: δ = -87.07

CF₂: δ_a = -87.99 δ_b = -89.34

IR, main bands (cm⁻¹) : 1248, 1209, 1153, 1103, 1023, 717.

Example 64-bromo-2,2,4,5,5-pentafluoro-1,3-dioxolane (6)

5 Into a multineck glass reactor equipped with: magnetic entrainment mechanical stirrer, reflux cooler, thermocouple, inner plunging pipes for introducing the reagents, and maintained at a temperature of -70°C , there were simultaneously fed - after having introduced 75 ml of dichlorodifluoromethane - 0.75 l of bis(fluoroxy)difluoromethane at a flowrate of 0.375 l/h diluted with N_2 (0.5 l/h) and bromotrifluoroethylene (5.4 g/h) for 2 hours.

10 The gas-chromatographic analysis of the rough reaction product (column thickness 1000, from 50°C to 200°C , $10^{\circ}\text{C}/\text{min.}$) revealed that the main reaction products: bromotrifluoro-oxirane, bromopentafluoroethane, dioxolane (6) and 1,1,2-tribromo-1,2,2-trifluoroethane, were present in the following ratios, respectively: 10%, 41.8%, 46.6% and 1.6%. Then, after stripping of most of the solvent and of a part of the low-boiling products such as oxirane and bromopentafluoroethane, said rough reaction product was distilled on a tray column, Spaltröhr Fisher, at atmospheric pressure.

15 The fraction having a boiling point ranging from 58°C to 63°C was collected; it consisted of 6.6 g of dioxolane (6).

The dioxolane (6) yield, defined as in example 1, was of 81%.

Characterization of dioxolane (6)

20 ^{19}F NMR spectrum, in p.p.m. from $\text{CFC}_3\text{O} = \text{O}$:
-55 (1F, OCF_2O), -58 (1F, OCF_2O); -63 (1F, CFBr), -12.2 (1F, CF_2), -91 (1F, CF_2).

Mass spectrum (electronic impact), main peaks and relevant intensities:

97 (100%), 163 (45%), 69 (38%), 47 (31%), 50 (19%).

Example 72,2,5,5-tetrafluoro-4-trifluoromethyl-1,3-dioxolane (7)

30 In a steel cylinder of 75 ml volume there were condensed, at the temperature of liquid nitrogen, 10 m.moles of CF_2Cl_2 (FC-12), reaction solvent, and 3.0 m.moles of 1,1,3,3,3-pentafluoropropene, then the cylinder was brought again to room temperature in order to permit the mixing of 1,1,3,3,3-pentafluoropropene and solvent.


In the same cylinder, cooled again in liquid nitrogen, there were then condensed, in the order, further 5 m.moles of FC-12 and 1.50 m.moles of BDM and the reaction temperature was gradually raised to room temperature in a time of 24 hours. The content was distilled in a conventional vacuum pipe through traps maintained at -80°C , -120°C , -196°C ; in the trap at -196°C there were recovered 15.2 m.moles of a mixture having the following composition (GLC): 95.4% of FC-12 and 4.3% of 1,1,1,2,3,3,3-heptafluoropropane, while at -120°C there were recovered 0.158 g of a mixture having the following composition: 21.6% of FC-12, 44.8% of 1,1,1,2,3,3,3-heptafluoropropane, 25.9% of (7), and at -80°C there were recovered 0.227 g of a mixture having composition: 1.7% of 1,1,1,2, 3,3,3-heptafluoropropane and 50.7% of (7).

(7) was characterized by means of mass spectrometry.

The calculated (7) yield was of 48%. Characterization of dioxolane;

Mass spectrum (electronic impact), main peaks and relevant intensities : 195 (2,6%); 175 (12,7%); 167 (9,4%); 148 (20,8%); 145 (29,9%); 129 (10,7%); 101 (22,1%); 79 (31,9%); 69 (100%); 51 (59,3%); 47 (20,1%).

45 ^{19}F NMR in p.p.m. from $\text{CFC}_3\text{O} = \text{O}$:



2-CF₂: $\delta = -55.59$

5-CF₂: $\delta_a = -66.41$ $\delta_b = -84.33$

CF₃: $\delta = -76.31$ complex doublet

H¹-NMR in p.p.m. from (CH₃)₄Si = O: 5.03 complex signal

5 IR, main bands (cm⁻¹): 2988, 1396, 1360, 1326, 1285, 1251, 1213, 1192, 1128, 963, 895, 853, 744, 702.

Example 8

4-chloro-2,2,4,5,5-pentafluoro-1,3-dioxolane (8)

10

Into a glass reactor equipped with: mechanical stirrer, reflux cooler, thermocouple, inner plunging pipes for introducing the reagents, and maintained at a temperature of -75°C, there were introduced 75 ml of dichlorodifluoromethane and 10 g of chlorotrifluoroethylene. Then 0.91 of bis(fluoroxy)difluoromethane at a flowrate of 0.4 l/h diluted with N₂ (0.5 l/h) were fed into the reactor.

15

At the end of the reaction, after having removed by distillation the chloropentafluoroethane, most of the solvent and the non-reacted chlorotrifluoroethylene, 12 g of a mixture were recovered containing 52% of dioxolane (8) in dichloro-difluorometano (GLC).

By distillation through cooled traps kept under vacuum, 5,2 g of dioxolane (8) were collected.

The dioxolane (8) yield, defined as in example 1, was equal to 65%.

20

Characterization of dioxolane (8)

NMR ¹⁹F spectrum in p.p.m. relating to CFCI₃ = O

-55 (1F, OCF₂O); -58 (1F, OCF₂O); -69 (1F, CFCI); -76 (1F, CF₂); -91 (1F, CF₂).

25

Mass spectrum (electronic impact), main peaks and relevant intensities:
66(82%); 69(86%); 97(100%); 116(68%); 132(38%); 163(92%); 179(1%).

Example 9

2,4-bis(trifluoromethyl)-2,4,5,5-tetrafluoro-1,3-dioxolane (9)

30

Into a multineck glass reactor of 200 ml volume equipped with: mechanical stirrer, reflux cooler kept at the temperature of -78°C, thermocouple, inner plunging pipes for introducing the reagents, and maintained at a temperature of -70°C, there were introduced 100 ml of dichlorodifluoromethane and 20 g of perfluoropropene. Then, there was fed a mixture of hypofluorites containing 70% of CF₃CF(OF)₂, 7,3% of CF₃CF₂OF and 2,2% of CF₃OF diluted with helium (5 l/h) for 3,5 hours.

35

The above mixture of hypofluorites was prepared according to the method described in Journal of Organic Chemistry 51,9 (1986), page 1485, i.e. feeding in a continuous manner a flow of F₂ at a flowrate of 0,5 l/h diluted with helium (5 l/h) on a bed of sodium trifluoroacetate (25 g) maintained at a temperature of -40°C.

40

From the rough reaction product, after stripping of the solvent, of the non-reacted perfluoropropene and of the low-boiling products such as, for example, CF₃CF₂CF₃ and CF₃OCF₂CF₂CF₃, 4,6 g of a mixture were recovered containing 72,5% of dioxolane (9) (GLC/MS), 10,7% of CF₃CF₂OCF(CF₃)₂ (GLC/MS) and 16,6% of CF₃CF₂OCF₂CF₂CF₃ (GLC/MS).

By preparative gas-chromatography, 2,1 g of dioxolane (9) were collected.

45


The dioxolane (6) yield, defined as in example 1, was equal to 14%.

Characterization of dioxolane (9)

NMR ¹⁹F spectrum in p.p.m. relating to CFCI₃ = O

50

55

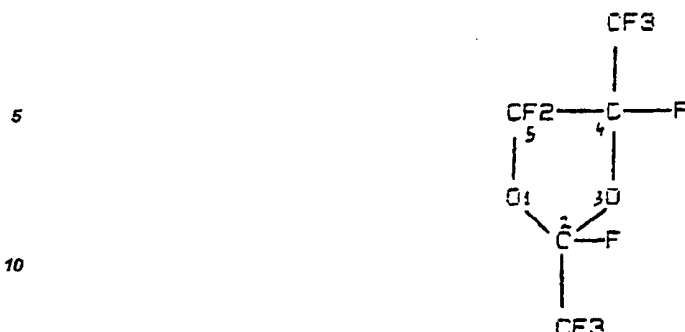

${}^2\text{-CF}_3 = 82.5$ ppm, ${}^2\text{-CF} = 89.4$ ppm, ${}^4\text{-CF} = 127.1$ ppm, ${}^4\text{-CF}_3 = 81.7$ ppm, ${}^5\text{-CF}_2 = 85.3$ ppm.

15 Mass spectrum (electronic impact), main peaks and relevant intensities:
relative: 263 (21%); 213(100%); 169(49%); 147(35); 119(82%); 97(68%); 69(66%).

Example 10

20 perfluoro-1,3-dioxolane (10)

Into a multineck glass reactor equipped with: magnetic entrainment mechanical stirrer, reflux cooler, thermocouple, inner plunging pipes for introducing the reagents, and maintained at a temperature of -80°C , there were simultaneously fed - after having introduced 75 ml of FC 75 - 0.5 l of bis(fluoroxy)difluoromethane at a flowrate of 0.3 l/h diluted with N_2 (0.5 l/h) and 5.0 g of tetrafluoroethylene (3.0 g/h).

25 The gas-chromatographic analysis of the rough reaction product (column thickness 1000, from 50°C to 200°C , $10^\circ\text{C}/\text{min.}$) revealed that the main reaction products: perfluoro-1,3-dioxolane, perfluoroethane and perfluorocyclobutane were present in the following ratios, respectively: 46%, 47% and 7%.
The dioxolane (10) yield, defined as in example 1, was of 56%.

30 Characterization of dioxolane (10)

Mass spectrum (electronic impact), main peaks and relevant intensities:
50(100%), 69(22%), 97(15%), 116(17%), 163(1%).

35 Example 11

4,4,5,5-tetrachloro-2,2-difluoro-1,3-dioxolane (11)

40 Into a multineck glass reactor of 100 ml volume equipped with: magnetic entrainment mechanical stirrer, reflux cooler, thermocouple, inner plunging pipes for introducing the reagents, and maintained at a temperature of -76°C , there were introduced 75 ml of dichlorodifluoromethane and 15 g of tetrachloroethylene. Then 1.00 l of bis(fluoroxy)difluoromethane at a flowrate of 0.3 l/h diluted with N_2 (0.5 l/h) were fed into the reactor.

45 At the end of the reaction, after having removed the solvent by distillation, 16,3 g of a mixture were recovered. The gas-chromatographic analysis (column thickness 1000, from 50°C to 180°C) revealed that said mixture contained 50,3% of the dioxolane (11) and 43% of 1,2-difluorotetrachloroethane.

The dioxolane (11) yield, defined as in example 1, was of 74%.

Characterization of dioxolane (11)

50 ${}^{19}\text{F}$ NMR spectrum, in p.p.m. from $\text{CFCl}_3\text{O} = \text{O}$: -47(2F, OCF_2O).

Mass spectrum (electronic impact), main peaks and relevant intensities:
47(30%), 82(60%), 119(52%), 145(100%); 166(31%), 213(32%).

Example 12**4,4,5,5-tetrachloro-2,2-difluoro-1,3-dioxolane (11)**


Into a multineck glass reactor of 350 ml volume equipped with: magnetic entrainment mechanical stirrer, reflux cooler, thermocouple, inner plunging pipes for introducing the reagents, and maintained at a temperature of -40°C , there were introduced 50 ml of CFCl_3 and 182 g of tetrachloroethylene. Then 0.6 moles of bis(fluoroxy)difluoromethane at a flowrate of 0.8 l/h di diluted with N_2 (0.5 l/h) were fed, into the reactor.

At the end of the reaction, after having removed the solvent by distillation, 202.4 g of a mixture were recovered.

By fractionating distillation 98.3 g of dioxolane (11) and 81.1 g of $\text{CFCl}_2\text{CFCl}_2$ were collected. The dioxolane (11) yield, defined as in example 1, was of 66%

Claims

1. A process for preparing halogenated 1,3-dioxolanes of formula:

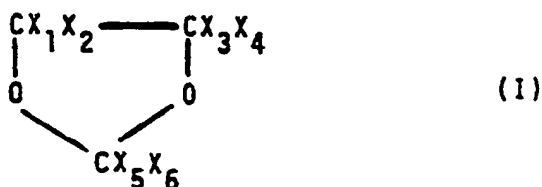

wherein:

X_1 , X_2 , X_3 and X_4 , like or different from one another, represent F, Cl, Br, I, $\text{CF}_2\text{OSO}_2\text{F}$, SO_2F , $\text{C}(\text{O})\text{F}$, H, perhaloalkyl or oxyperhaloalkyl radicals containing from 1 to 5 carbon atoms,

X_5 and X_6 , like or different from each other, represent F or CF_3 , characterized in that a bis(fluoroxy)perfluoroalkane of formula $\text{C}(\text{OF})_2\text{X}_5\text{X}_6$ is reacted, at a temperature ranging from -140°C to $+60^{\circ}\text{C}$, with a halogenated olefin of formula $\text{CX}_1\text{X}_2=\text{CX}_3\text{X}_4$, X_1 , X_2 , X_3 , X_4 , X_5 and X_6 being the same as defined hereinbefore.

2. The process according to claim 1, characterized in that the reaction is conducted by feeding to a reaction vessel containing a liquid phase consisting of the halogenated olefin, a bis(fluoroxy)perfluoroalkane stream, and by separating the reaction products on conclusion of the reaction.
3. The process according to claim 1, characterized in that the reaction is conducted by simultaneously feeding to a reaction vessel a halogenated olefin stream and a bis(fluoroxy)perfluoroalkane stream and by separating the reaction products on conclusion of the reaction.
4. The process according to claim 2 or 3, characterized in that the reaction is conducted under conditions of continuous withdrawing a liquid phase portion, from which the reaction products are separated, the residual portion being recycled.
5. The process according to one or more of claims 2 to 4, characterized in that a stream of the halogenated olefin in liquid or gas phase is fed to the reaction vessel.
6. The process according to one or more of the preceding claims, characterized in that bis(fluoroxy)perfluoroalkane is diluted in an inert gas.
7. The process according to claim 1, characterized in that a bis (fluoroxy)perfluoroalkane of formula $\text{C}(\text{OF})_2\text{X}_5\text{X}_6$ and a halogenated olefin of formula $\text{CX}_1\text{X}_2=\text{CX}_3\text{X}_4$ are condensed in the reaction vessel at a temperature not higher than -140°C , X_1 , X_2 , X_3 , X_4 , X_5 and X_6 being the same as defined hereinbefore; that said vessel is brought to a temperature ranging from -140 to $+60^{\circ}\text{C}$ and is maintained at said temperature for a time of from 1 hour to 24 hours, and that on conclusion of the reaction the reaction products are separated, on condition that at least one from among X_1 , X_2 , X_3 and X_4 is F.

8. The process according to one or more of the preceding claims, characterized in that bis(fluoroxy)perfluoroalkane is bis(fluoroxy)difluoromethane.
- 5 9. The process according to one or more of the preceding claims, characterized in that the halogenated olefin contains from 2 to 6 carbon atoms and in particular it is selected from the group consisting of: $\text{CFCI}=\text{CFCI}$, $\text{CFBr}=\text{CFBr}$, $\text{CF}_2=\text{CFBr}$, $\text{CF}_2=\text{CH}-\text{CF}_3$, $\text{CF}_2=\text{CF}-\text{SO}_2\text{F}$, $\text{CF}_2=\text{CF}-\text{CF}_2-\text{OSO}_2\text{F}$, $\text{CF}_2=\text{CF}-\text{C}(\text{O})\text{F}$, $\text{CF}_2=\text{CF}-\text{CF}_3$, $\text{CF}_2=\text{CF}-\text{O}-\text{CF}_2-\text{CF}_3$.
- 10 10. The process according to one or more of the preceding claims, characterized in that the reaction is conducted at a temperature ranging from -100°C to $+30^\circ\text{C}$.
11. The process according to one or more of claims 2 to 10, characterized in that a solvent selected from the group consisting of straight and cyclic fluorocarbons, chlorofluorocarbons, perfluoroamines and perfluorinated ethers is present in the reaction vessel.
- 15 12. Halogenated 1,3-dioxolanes of formula (I) in which: X_1 , X_2 , X_3 and X_4 , like or different from one another, represent F, Cl, Br, I, $\text{CF}_2\text{OSO}_2\text{F}$, SO_2F , $\text{C}(\text{O})\text{F}$, H, perhaloalkyl or oxyperhaloalkyl radicals containing from 1 to 5 carbon atoms; X_5 and X_6 , like or different from each other, are F or CF_3 ; on condition that:
- 20 – at least one from among X_1 , X_2 , X_3 , X_4 is Br, $\text{CF}_2\text{OSO}_2\text{F}$, SO_2F , $\text{C}(\text{O})\text{F}$, a perhaloalkyl or oxyperhaloalkyl radical containing from 1 to 5 carbon atoms, and that furthermore
- when one from among X_1 , X_2 , X_3 and X_4 is CF_3 , at least one of the other three is different from F, or X_5 and X_6 are CF_3 , and
- when one from among X_1 , X_2 , X_3 and X_4 is Br or I, the other three are F, or at least one out of X_5 and X_6 is F.
- 25 13. Halogenated 1,3-dioxolanes according to claim 12, wherein at least two out of X_1 , X_2 , X_3 and X_4 are F.
14. Halogenated 1,3-dioxolanes according to claim 12, wherein at least three out of X_1 , X_2 , X_3 and X_4 are F.
- 30 15. Halogenated 1,3-dioxolanes according to one or more of claims 12 to 14, wherein X_5 and X_6 are F.



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11) Publication number : **0 460 948 A3**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : **91305109.0**

(51) Int. Cl.⁵ : **C07D 317/42**

(22) Date of filing : **06.06.91**

(30) Priority : **07.06.90 IT 2057890**

(43) Date of publication of application :
11.12.91 Bulletin 91/50

(64) Designated Contracting States :
BE DE ES FR GB NL

(88) Date of deferred publication of search report :
25.03.92 Bulletin 92/13


(71) Applicant : **AUSIMONT S.p.A.**
Foro Buonaparte, 31
I-20121 Milano (IT)

(72) Inventor : **Navarrini, Walter**
46/48, Via A Moro
I-20010 Boffalora Sopra Ticino, Milan (IT)
Inventor : **Fontana, Simonetta**
8, Via Odazio
I-20147 Milan (IT)
Inventor : **Montanari, Vittorio**
29, Via Muratori
I-20135 Milan (IT)

(74) Representative : **Jones, Helen Marjorie**
Meredith et al
Gill Jennings & Every 53-64 Chancery Lane
London WC2A 1HN (GB)

(54) **Process for preparing halogenated 1,3-dioxolanes and new products obtained.**

(57) A process for preparing 1,3-dioxolanes of formula :



(I)

wherein ;

X₁, X₂, X₃ and X₄, like or different from one another, represent F, Cl, Br, I, CF₂OSO₂F, SO₂F, C(O)F, H, perhaloalkyl or oxyperhaloalkyl radicals containing from 1 to 5 carbon atoms,

X₅ and X₆, like or different from each other, represent F or CF₃. Said process is characterized in that a bis(fluoroxy)perfluoroalkane is reacted, at a temperature ranging from -140°C to +60°C, with a halogenated olefin.

New 1,3-dioxolanes of formula (I) belonging to the class defined hereinbefore.

EP 0 460 948 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 91 30 5109

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	DE-A-1 593 958 (E. I. DU PONT) * page 1 - page 8 *	12	C07D317/42
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			C07D
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 30 JANUARY 1992	Examiner FRANCOIS J. C.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 150 01.82 (P0001)